






A complete, versatile system of modular containers, perfectly integrable in the SYSTEM domestic range and able to meet the high protection installation requirements of the residential, commercial and industrial sectors. The 27 COMBI range is available both in the IP40 version and in watertight versions with IP55, IP65 and IP66 degree of protection, recommended for all outdoor applications which are subjected to extreme atmospheric conditions.

Description	8 modules	Colour
No. knockout holes Ø23	10 on sides / 2 on the bottom	Type of knockout holes
IP degree	IP40	Insulation class
Mechanical resistance	IK07	Configuration
Compartment pre-arrangement	2	Characteristics
Lid screws	Corrosion-resistant steel	Torque screws tightening
Outer dim. LxHxD (mm)	231x82x55	Glow Wire Test
Thermo-pressure with ball	70 °C	Standard
Installation temperature	-25 +60 °C	Electrocod
		Grey RAL 7035
		Removable with tool
		II
		Module 4 x 2
		Halogen free
		0.8 Newton/meter
		650 °C
		EN 60670-1
		0212

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Resistant	Resistant	Limited resistance	Not resistant	Not resistant	Not resistant	Limited resistance	Resistant

#### DIMENSIONAL

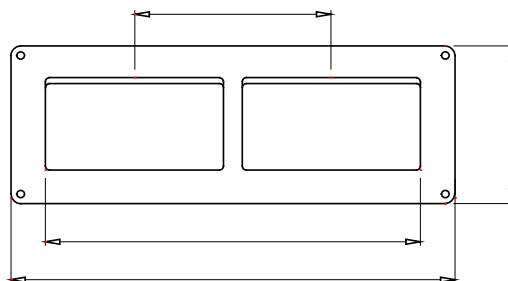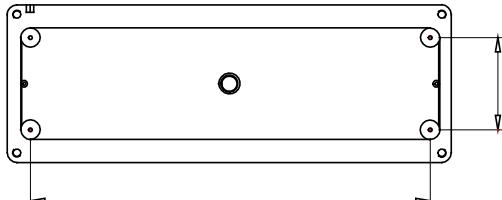

#### TECHNICAL SYMOLOGY



IP



Removable with tool

IP40

II

IK


IK07



Halogen free

GWT

650 °C



70 °C



#### STANDARDS/APPROVALS

